



GS53

PT. GREAT MICROTAMA ELECTRONICS INDONESIA


4Pad version : 5.0 x 3.2 mm

Features :

- Surface Mount Crystal
- 1.0mm Thickness, Seam Sealed
- Excellent Solderability



Pb free : Pins / pads

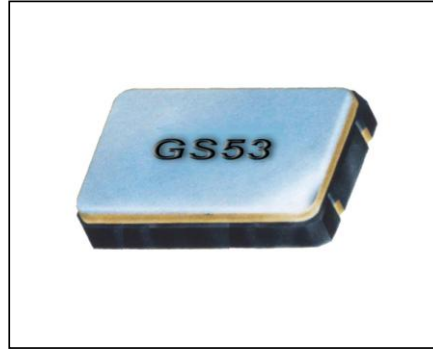

General Specifications

Frequency Range	10.0 ~ 55.0 MHz (Fund. AT-Cut)				
Frequency Tolerance @ 25 degC	±10 ppm / ±30 ppm				
Frequency Stability	±10 ppm ~ ±50 ppm				
Operating Temperature Range	Temp Range	±10ppm	±20ppm	±30ppm	±50ppm
	-20 °C to +70 °C	o	o	■	o
	-40 °C to +85 °C		o	o	o
	* Remarks : ■ Standart o Available				
Equivalent Series Resistance	Please refer to table 1 below				
Load Capacitance	12 pF (standard)				
Drive Level	100µW				


* Remarks : Please contact us for any further enquiry

Frequency Range, Equivalent Series Resistance and Mode of Oscillation (Table 1)

Frequency Range (MHz)	Equivalent Series Resistance Maximum (Ohm)
Fundamental	
10.0 ~ 10.99	50
11.00 ~ 11.99	40
12.00 ~ 21.99	40
22.00 ~ 24.99	40
25.00 ~ 49.99	30
50.00 ~ 55.00	40

Specifications are subjected to change without notice.

Dimensions

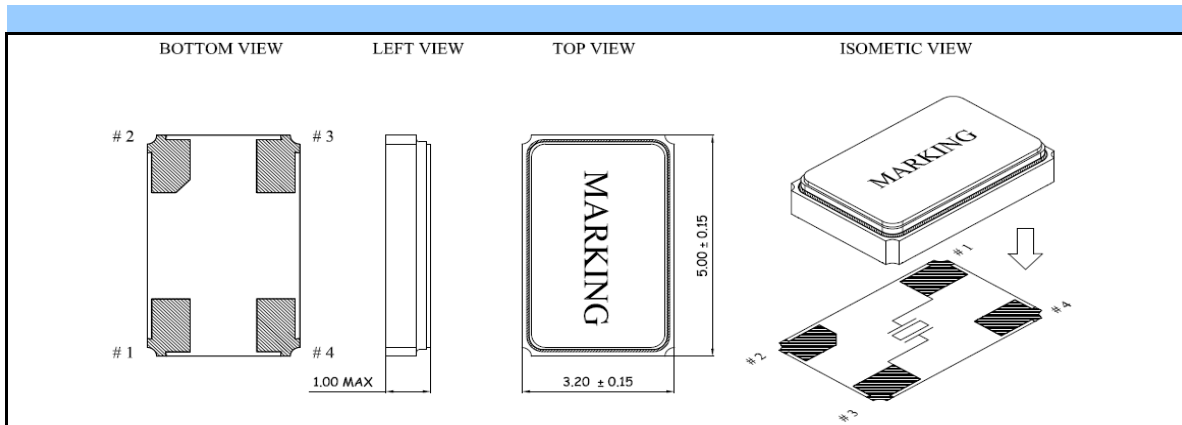

PT Great Microtama Electronics Ind. Berbek Industri III/21 Surabaya. Indonesia
 Fax: 62-31-8431305 Tel: 62-31-8431330 E-mail: greatind@greatmicro.com