



GS75

PT. GREAT MICROTAMA ELECTRONICS INDONESIA



2Pad version : 7.0 x 5.0 mm

Features :

- Surface Mount Crystal
- 1.2mm Thickness, Seam Sealed
- Excellent Solderability

General Specifications

Frequency Range	5.53 ~ 54.0 MHz (Fund. AT-Cut)				
Frequency Tolerance @ 25 degC	±10 ppm ~ ±30 ppm				
Frequency Stability	±10 ppm ~ ±50 ppm				
Operating Temperature Range	Temp Range	±10ppm	±20ppm	±30ppm	±50ppm
	-20 °C to +70 °C	o	o	■	o
	-40 °C to +85 °C		o	o	o
	* Remarks : ■ Standard o Available				
Equivalent Series Resistance	Please refer to table 1 below				
Load Capacitance	12 pF (standard)				
Drive Level	100µW				


* Remarks : Please contact us for any further enquiry

Frequency Range, Equivalent Series Resistance and Mode of Oscillation (Table 1)

Frequency Range (MHz)	Equivalent Series Resistance Maximum (Ohm)
Fundamental	
5.53 ~ 5.99	150
6.00 ~ 6.99	100
7.00 ~ 9.99	80
10.00 ~ 15.99	60
16.00 ~ 21.99	50
22.00 ~ 24.99	40
25.00 ~ 54.00	30
Third Overtone	
24.000 ~ 150.000	on request

Specifications are subjected to change without notice.

Dimensions

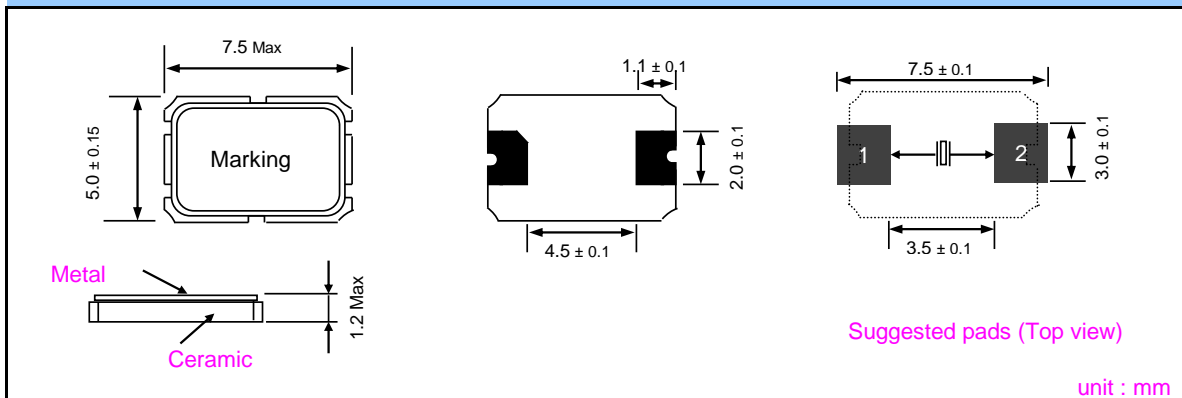

PT Great Microtama Electronics Ind. Berbek Industri III/21 Surabaya. Indonesia
 Fax: 62-31-8431305 Tel: 62-31-8431330 E-mail: greatind@greatmicro.com